


USB 充电器系列 USB CHARGER SERIES

B33 A+C FAST CHARGING PD33W CHARGER
B33 PD33W A+C 快充 充电器

应用 Application

SUITABLE FOR INDOOR USE
适用于室内使用

产品证书 Certificate




特 点 Features

- ★ 支持国家及规格：中规、美规，欧规，印度规，韩规，英规，支持多色，目前黑色/白色
- ★ 能承受 1000VAC 浪涌
- ★ 工作温度高达 55 °C
- ★ 承受 5G 振动测试。
- ★ 长达 2 年固件质保，值得信赖。
- ★ 保护种类：短路/过负载/过电压/过温度
- ★ 高效率全部使用 105 °C 长寿命电解电容
- ★ 外壳采用 PC 阻燃，材料全部达到 ROHS 标准
- ★ 支持协议 PD3.0\PPS\SCP\V00C\QC3.0\AFC\FCP
- ★ Supports: US/EU/UK/AU/CCC
- ★ supports multiple colors, currently black/white
- ★ Capable of withstanding 1000VAC surges
- ★ Working temperature up to 55 °C
- ★ withstand 5G vibration test.
- ★ Up to 2 years of firmware warranty, trustworthy.
- ★ Protection type: short circuit/overload/overvoltage/over temperature
- ★ High efficiency All use 105 °C long-life electrolytic capacitor
- ★ The shell adopts PC flame retardant, and all materials meet ROHS standards
- ★ support agreement

PD3.0\PPS\SCP\V00C\QC3.0\AFC\FCP

Mach.outline Drawing 产品结构尺寸

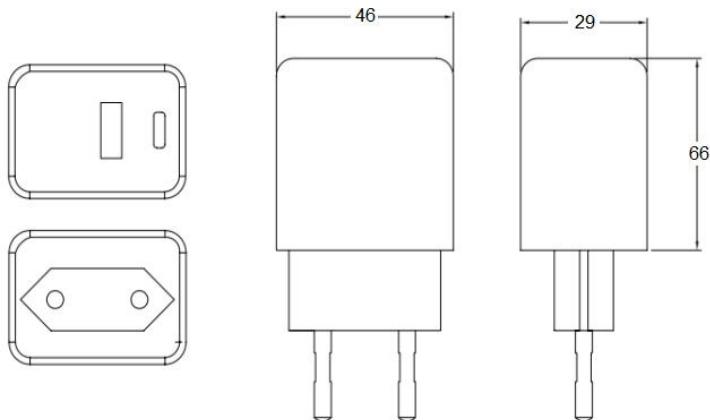

Environment and size 环境与尺寸

Working temperature 工作温度	-35°C~+55°C
Storage temperature 储存温度	-40°C~+85°C
Working Relative Humidity 相对工作湿度	5%-95%
Storage Relative Humidity 储存相对湿度	10% - 100%

Electrical Features 电性能

Input Voltage	输入 电压	AC100~240V
Input frequency	输入 频率	50/60Hz
In-rush current	浪涌 电流	冷启动: 230V60A
Powerfactor	功 率 因 数	0.6
Ripple &Noise	纹波&噪声	输出电压1%(MAX)
Protection	保 护	OLP,SCP,OVP,OTP
Lifetime	寿 命	> 2 Years

Model & Key parameters 型号及关键参数

Model	Output power	Support voltage	Output current	Outline size	Efficiency	Safe approval
型号	输出功率 (W)	支持电压 (V)	输出电流 (A)	外形尺寸(MM)	效率	安规认证
B36 TYPE-C	33W (MAX)	DC: 5V/9V/12V/15V/20	3.0A/3.0A/2.5A/2A/1.65A	66*29*46mm	85~92%	CCC,PSE,ETL,GS,CE, KC
B36 USB-A	33W (MAX)	DC: 5V/9V/12V/15V/20	3.0A/3.0A/2.5A/2A/1.65A	66*29*46mm	85~92%	CCC,PSE,ETL,GS,CE, KC
B36 USB+TYPE-C	33W (MAX)	DC: 5V/9V/12V/15V/20	3.0A/3.0A/2.5A/2A/1.65A	66*29*46mm	89~92%	CCC,PSE,ETL,GS,CE, KC