

USB 充电器系列 USB CHARGER SERIES

D25 A+C FAST CHARGING PD65W CHARGER
D25 PD65W A+C 快充 充电器

应用 Application
SUITABLE FOR INDOOR USE
适用于室内使用


产品证书 Certificate
CCC CE FC UL



特点 Features

- ★ 支持国家及规格：中规、美规，欧规，印度规，韩规，英规，支持多色，目前黑色/白色
 - ★ 能承受 1000VAC 浪涌
 - ★ 工作温度高达 55 ° C
 - ★ 承受 5G 振动测试。
 - ★ 长达 2 年固件质保，值得信赖。
 - ★ 保护种类：短路/过载/过电压/过温度
 - ★ 高效率全部使用 105 ° C 长寿命电解电容
 - ★ 外壳采用 PC 阻燃，材料全部达到 RH05 标准
 - ★ 支持协议 PD3.0\PPS\SCP\V00C\QC3.0\AFC\FCP
- ★ Supports: US/EU/UK/AU/CCC supports multiple colors, currently black/white
 - ★ Capable of withstanding 1000VAC surges
 - ★ Working temperature up to 55 ° C
 - ★ withstand 5G vibration test.
 - ★ Up to 2 years of firmware warranty, trustworthy.
 - ★ Protection type: short circuit/overload/overvoltage/over temperature
 - ★ High efficiency All use 105 ° C long-life electrolytic capacitor
 - ★ The shell adopts PC flame retardant, and all materials meet RH05 standards
 - ★ support agreement PD3.0\PPS\SCP\V00C\QC3.0\AFC\FCP

Mach.outline Drawing 产品结构尺寸

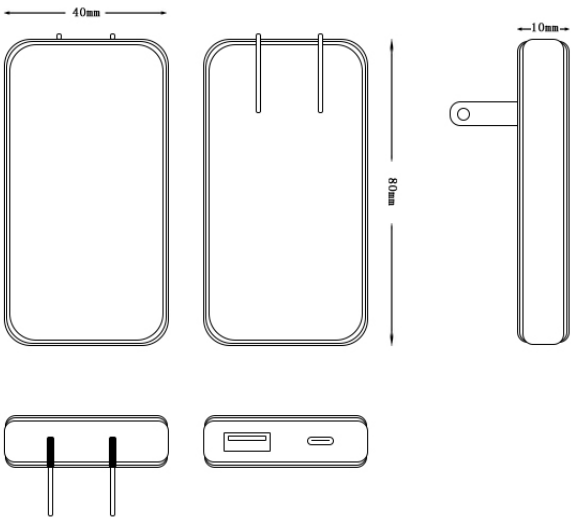

Environment and size环境尺寸	
Working temperature 工作温度	- 3 5 ° C ~ + 55 ° C
Storage temperature 储存温度	- 40 ° C ~ + 85 ° C
Working Relative Humidity 相对工作湿度	5% - 95%
Storage Relative Humidity 储存相对湿度	10 % - 100 %

Electrical Features电性能	
Input Voltage 输入电压	AC100~240V
Input frequency 输入频率	50/60Hz
In-rush current 浪涌电流	冷启动: 230V60A
Power factor 功率因数	0.6
Ripple & Noise 纹波&噪声	输出电压1%(MAX)
Protection 保护	OLP,SCP,OVP,OTP
Lifetime 寿命	> 2 Years

Model & Key parameters 型号及关键参数

Model 型号	Output power 输出功率 (W)	Support voltage 支持电压 (V)	Output current 输出电流 (A)	Outline size 外形尺寸 (MM)	Efficiency 效率	Safe approval 安规认证
D25 USB+TYPE-C	65W (MAX)	DC: 5V/9V/12V/20V	3.0A/2.5A/2A/3.25A	80*40*10mm	85~92%	CCC,PSE,ETL,GS,CE,KC