

USB 充电器系列 USB CHARGER SERIES

D24 A+C FAST CHARGING PD65W CHARGER
D24 PD65W A+C 快充 充电器

应用 Application

SUITABLE FORINDOORUSE

适用于室内使用

产品证书 Certificate




特点 Features

- ★ 支持国家及规格：中规、美规，欧规，印度规
韩规，英规，支持多色，目前黑色/白色
- ★ 能承受 1000VAC 浪涌
- ★ 工作温度高达 55 ° C
- ★ 承受 5G 振动测试。
- ★ 长达 2 年固件质保，值得信赖。
- ★ 保护种类：短路/过负载/过电压/过温度
- ★ 高效率全部使用 105 ° C 长寿命电解电容
- ★ 外壳采用 PC 阻燃，材料全部达到 RH05 标准
- ★ 支持协议 PD3.0\PPS\SCP\V00C\QC3.0\AFC\FCP

- ★ Supports: US/EU/UK/AU/CCC
supports multiple colors, currently black/white
- ★ Capable of withstanding 1000VAC surges
- ★ Working temperature up to 55 ° C
- ★ withstand 5G vibration test.
- ★ Up to 2 years of firmware warranty, trustworthy.
- ★ Protection type: short circuit/overload/overvoltage/over temperature
- ★ High efficiency All use 105 ° C long-life electrolytic capacitor
- ★ The shell adopts PC flame retardant, and all materials meet RH05 standards
- ★ support agreement
PD3.0\PPS\SCP\V00C\QC3.0\AFC\FCP



Mach.outline Drawing 产品结构尺寸

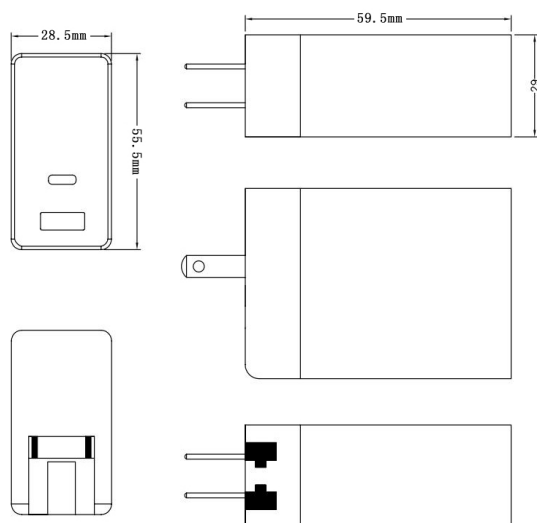

Model & Key parameters 型号及关键参数

Environment and size环境与尺寸		
Working temperature 工作温度		- 3 5℃~+55℃
Storage temperature 储存温度		- 40℃~+85℃
Working Relative Humidity 相对工作湿度		5%-95%
Storage Relative Humidity 储存相对湿度		10 % - 100 %
Electrical Features电性能		
Input Voltage 输入电压		AC100~240V
Input frequency 输入频率		50/60Hz
In-rush current 浪涌电流		冷启动: 230V60A
Power factor 功率因数		0.6
Ripple & Noise 纹波&噪声		输出电压1%(MAX)
Protection 保护		OLP,SCP,OVP,OTP
Lifetime 寿命		> 2 Years

Model 型号	Output power 输出功率 (W)	Support voltage 支持电压 (V)	Output current 输出电流(A)	Outline size 外形尺寸(MM)	Efficiency 效率	Safe approval 安规认证
D24 USB+TYPE-C	65W (MAX)	DC: 5V/9V/12V/20V	3.0A/2.5A/2A/3.25A	59.5*28.5*55.5	85~92%	CE,PSE,ETL,GS,KC