

USB 充电器系列 USB CHARGER SERIES

B21 A+C FAST CHARGING PD45W CHARGER
B21 PD45W A+C 快充 充电器

应用 Application

SUITABLE FOR INDOOR USE

适用于室内使用

产品证书 Certificate




特点 Features

- ★ 支持国家及规格：中规、美规，欧规，印度规
- ★ 韩规，英规，支持多色，目前黑色/白色
- ★ 能承受 1000VAC 浪涌
- ★ 工作温度高达 55 ° C
- ★ 承受 5G 振动测试。
- ★ 长达 2 年固件质保，值得信赖。
- ★ 保护种类：短路/过载/过电压/过温度
- ★ 高效率全部使用 105 ° C 长寿命电解电容
- ★ 外壳采用 PC 阻燃，材料全部达到 RH05 标准
- ★ 支持协议 PD3.0\PPS\SCP\V00C\QC3.0\AFC\FCP

- ★ Supports: US/EU/UK/AU/CCC
- ★ supports multiple colors, currently black/white
- ★ Capable of withstanding 1000VAC surges
- ★ Working temperature up to 55 ° C
- ★ withstand 5G vibration test.
- ★ Up to 2 years of firmware warranty, trustworthy.
- ★ Protection type: short circuit/overload/overvoltage/over temperature
- ★ High efficiency All use 105 ° C long-life electrolytic capacitor
- ★ The shell adopts PC flame retardant, and all materials meet RH05 standards
- ★ support agreement



Mach.outline Drawing 产品结构尺寸

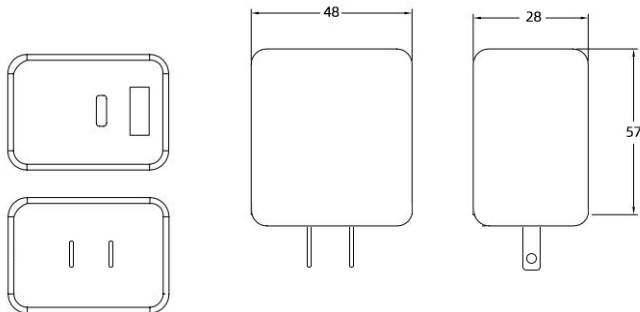

Environment and size 环境与尺寸

Working temperature 工作温度	- 3 5℃~+55℃
Storage temperature 储存温度	- 40℃~+85℃
Working Relative Humidity 相对工作湿度	5%-95%
Storage Relative Humidity 储存相对湿度	10 % - 100 %

Electrical Features 电性能

Input Voltage 输入电压	AC100~240V
Input frequency 输入频率	50/60Hz
In-rush current 浪涌电流	冷启动: 230V60A
Power factor 功率因数	0.6
Ripple & Noise 纹波&噪声	输出电压1%(MAX)
Protection 保护	OLP,SCP,OVP,OTP
Lifetime 寿命	> 2 Years

Model & Key parameters 型号及关键参数

Model 型号	Output power 输出功率 (W)	Support voltage 支持电压 (V)	Output current 输出电流 (A)	Outline size 外形尺寸 (MM)	Efficiency 效率	Safe approval 安规认证
B21 TYPE-C	45W (MAX)	5V/9V/12V/20V	3.0A/2.25A	57*28*48mm	85~92%	CCC,PSE,ETL,GS,CE, KC
B21 TYPE-C+C	45W (MAX)	5V/9V/12V/20V	3.0A/2.25A	57*28*48mm	85~92%	CCC,PSE,ETL,GS,CE, KC
B21 USB+TYPE-C	45W (MAX)	5V/9V/12V/20V	3.0A/2.25A	57*28*48mm	89~92%	CCC,PSE,ETL,GS,CE, KC